

Glue Down Vinyl - LVT




Plank dimensions: 1532 x 236.6 x 2.5mm (3.625sqm/box)
Wear Layer 0.55mm



BELLA FLOORING

LVT Technical Data Sheet

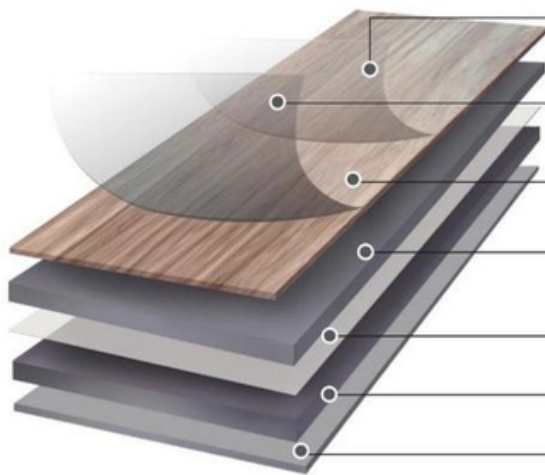

PU Coating

The factory applied UV surface treatment, provides superior cleaning benefits & life cycle maintenance savings.

Wear Layer

This transparent layer protects the decoration of flooring. It also creates the highly authentic effect of surface embossing.

Decoration Layer

We offer a broad and attractive range of design for you to create looks unique to your space.

Stabilization Layer

Lifetime dimensional stability is achieved by using our innovative health friendly stabilizer formula.

Glass Fiber Layer (For loose lay)

Enhance the stability performance of the product.

Backing Layer

This layer creates the elasticity and good under foot feeling for our user.

Anti-migration Layer

Firmly grabs the floor and allows easy glue-free installation

Product Specifications

Total Thickness	2.5 mm
Wear Layer	0.55 mm Commercial-Grade
Plank Size	1532 × 236.6 mm
Water Resistance	100% Water Resistant (Topical Spills)
Scratch & Stain	Scratch & Stain Resistant
Surface	Realistic Oak Wood Texture
Applications	Residential & Commercial
Maintenance	Low Maintenance & Easy to Clean

Performance	Result
ASTM F137 Flexibility	Pass
ASTM F970 Static Load	0.02 mm
ASTM F1914 Residual Indentation	2.1% Avg / 2.9% Max

ASTM F2199 Dimensional Stability	Pass
ASTM F1514 Heat Resistance	ΔE 0.19
ASTM F1515 Light Resistance	ΔE 0.73
ASTM F925 Chemical Resistance	Pass
DIN 51130 Slip Resistance	R10



SAWLFA
& FLOORING ASSOCIATION
MEMBER



EN ISO 10582 - Fit for use classification



Heavy Domestic
(Class 23)



Light Commercial
(Class 31)